

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/12/05	
A		REVISED DIM.	2/11/09	
B		UPDATE spec.	10/24/18	AY/TY

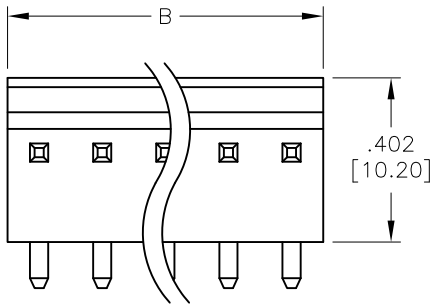

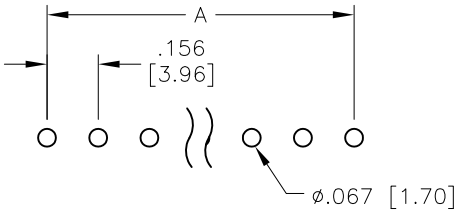

RECOMMENDED PCB LAYOUT

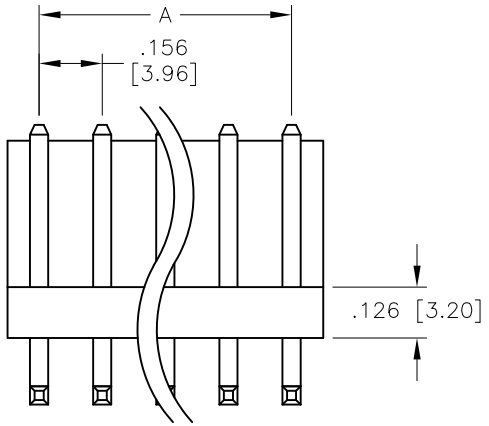

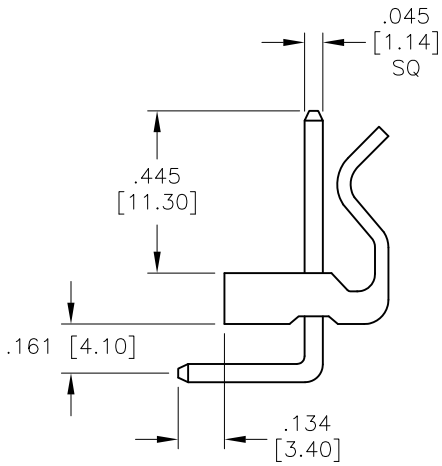

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-2
Insulator color: White
Contacts: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Voltage rating: 250V AC/DC
Current rating: 5 A AC/DC
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,500 VAC for 1 minute
Temperature Rating:
-25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 2 thru 20
A = .156 [3.96] x No. of (Positions -1)
B = .156 [3.96] x No. of positions

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	4/12/05
CHECKED		
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.156 [3.96] POWER HEADER
RIGHT ANGLE, WITH LOCK POLARIZER

SIZE	PART NO.	REV.
X	LHB-XX-SB1	B

REF:	SCALE:	SHEET
S00016T	NTS	1 OF 1