GOOD-ARK SEMICONDUCTOR

MUR1620CT/MUR1620FCT

Super Fast Recovery Rectifiers
Reverse Voltage 200V Forward Current 16A

Features

- FRED (Planar) wafer construction
- Low forward voltage drop, low power loss
- High efficiency
- Plastic package has underwriters Laboratory Flammability Classification 94V-0




MUR1620CT
Package: TO-220-AB



MUR1620FCT
Package: ITO-220-AB

Mechanical Data

- Case: Epoxy, Molded
- Weight: 1.9grams (approximately)
- Finish: all external surfaces corrosion resistant and terminal leads are readily solderable
- Lead temperature for soldering purposes: 260°C max. for 10 sec
- 50 units per plastic tube



1. Anode 2.Cathode 3. Anode

Maximum Ratings and Electrical Characteristics (T_A = 25°C unless otherwise noted)

PARAMETER	TEST CONDITIONS		SYMBOL	VALUE	UNIT
Maximum Repetitive Peak Reverse Voltage			V_{RRM}	200	V
Working Peak Reverse Voltage			V_{RWM}	200	V
Maximum DC Blocking Voltage			V_{DC}	200	V
Maximum Average Forward Rectified Current at T_C=105°C — Total Device Per Diode			$I_{F(AV)}$	16 8	A
Peak Forward Surge Current 8.3ms Single Half Sine-wave Superimposed on Rated Load per Diode			I_{FSM}	125	A
Voltage Rate of Change(rated V_R)			dv/dt	10000	V/us
Operating Junction Temperature Range			T_J	- 55 to+150	°C
Storage Temperature Range			T_{STG}	- 55 to+150	°C
Maximum Reverse Recover Time (I_F=0.5Amp, I_R=1.0Amp,Irec=0.25Amp)			T_{rr}	35	ns
Maximum Instantaneous Forward Voltage per Leg	I_F=8A I_F=8A	T_C=25°C T_C=125°C	V_F	1.00 0.90	V
Maximum Reverse Current per Leg at Working Peak Reverse Voltage		T_J=25°C T_J=100°C	I_R	10 500	uA uA

Thermal Characteristics T_A=25°C unless otherwise noted

Symbol	Parameter	TYP.(MUR1620CT)	TYP.(MUR1620FCT)	Unit
$R_{\theta JC}$	Thermal Resistance, Junction to Case per Leg	2.0	4.0	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient per Leg	62.5	62.5	°C/W

Note: Pulse test:300us pulse width, duty cycle=2%

MUR1620CT/MUR1620FCT

Super Fast Recovery Rectifiers
Reverse Voltage 200V Forward Current 16A

Ratings and Characteristics Curves (T_A = 25°C unless otherwise noted)

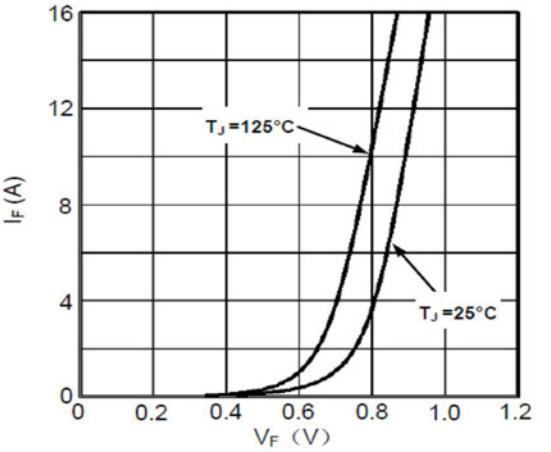


Fig1. Forward Voltage Drop vs Forward Current

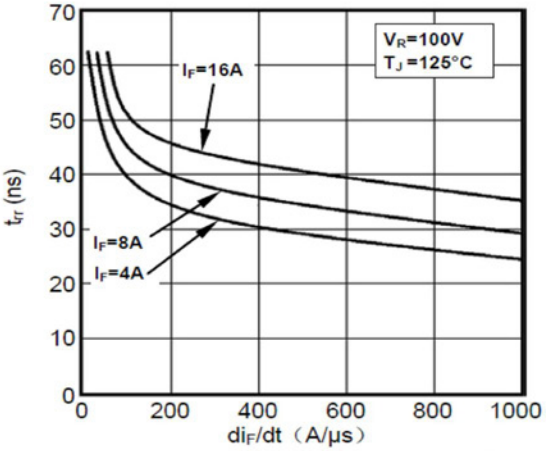


Fig2. Reverse Recovery Time vs di_F/dt

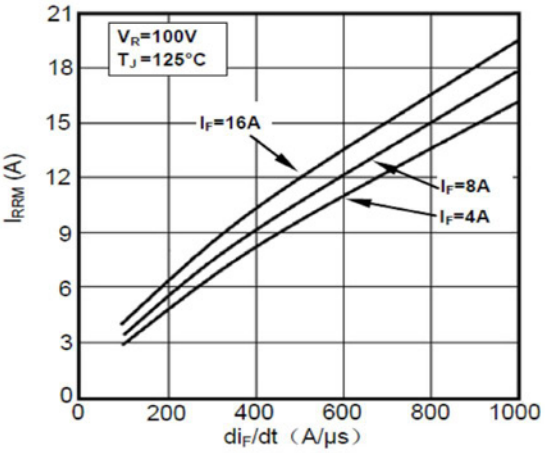


Fig3. Reverse Recovery Current vs di_F/dt

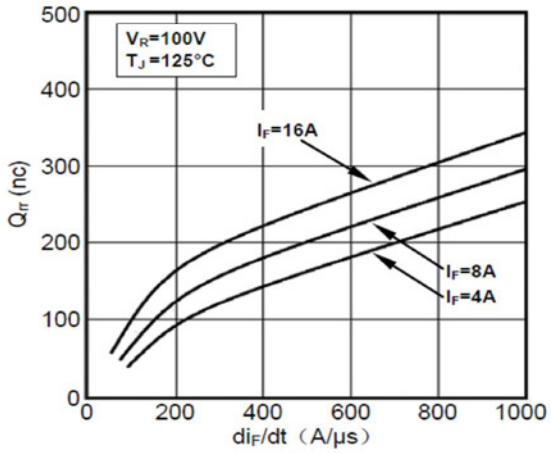


Fig4. Reverse Recovery Charge vs di_F/dt

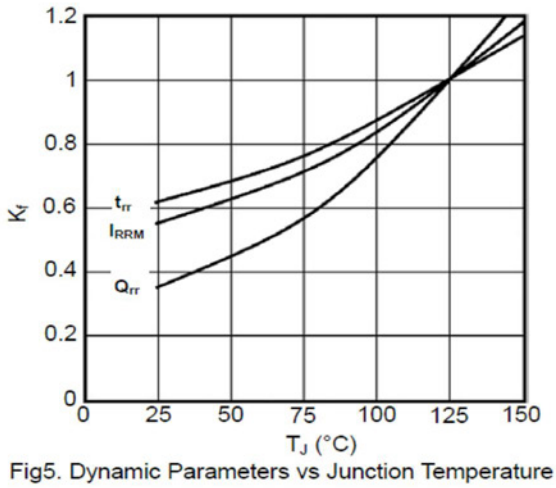


Fig5. Dynamic Parameters vs Junction Temperature

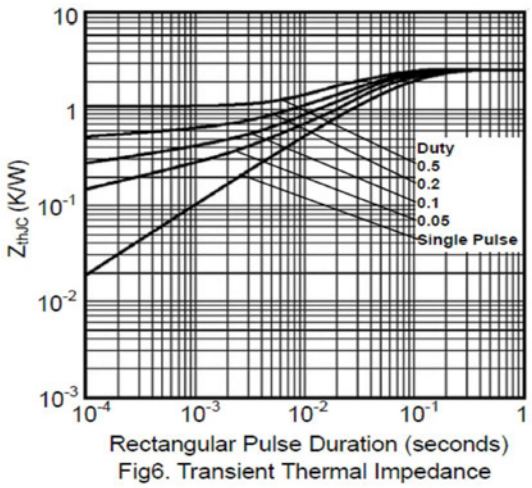


Fig6. Transient Thermal Impedance


MUR1620CT/MUR1620FCT

Super Fast Recovery Rectifiers
Reverse Voltage 200V Forward Current 16A

Package Outline Dimensions

Unit: millimeters

TO-220-AB

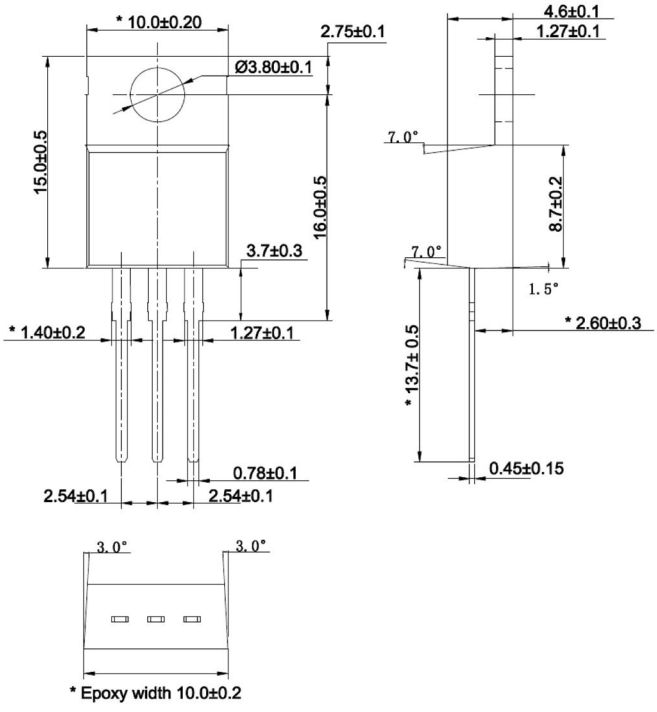

ITO-220-AB

